



Top View

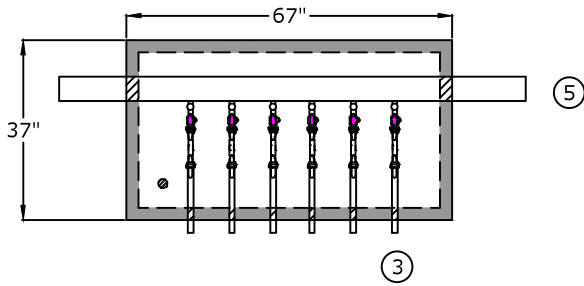


1. Meter Yoke
A.Y. McDonald 21-207WXQQ 33
Ford VB72-7W-44-33-Q
2. Corporation Stop
A.Y. McDonald 4704BQ 3/4
Ford FB11003Q
3. Type K Copper
4. 30" x 60" opening single leaf aluminum door, pedestrian rated (300 lb/ft²)
5. 4" Class 52 D.I.P.
6. 2" drain hole


Side View

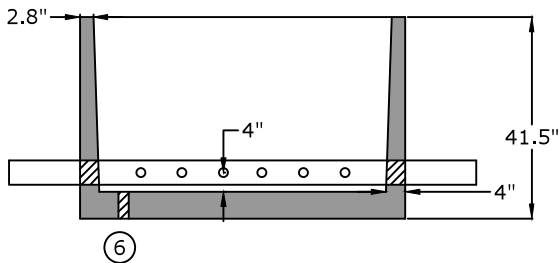


Component Detail

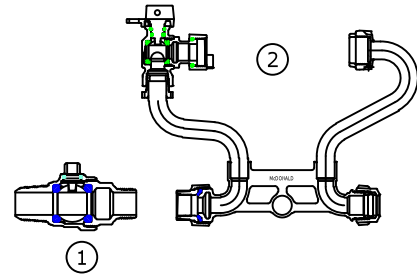

End View



Pipe detail for taps

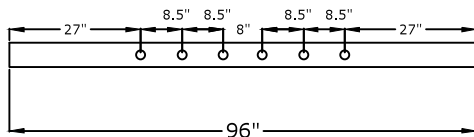

Approved for Production

Project: _____

Quantity: _____

Date: _____

By: _____



Five generations. One goal.
BargerAndSons.com
Quality precast concrete.

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

Specifications

- Concrete:** 5,000 psi minimum strength (28 day)
Pipe Penetrations: The inlet and outlet are fitted with solid rubber seals that meet or exceed ASTM C923 (4" D.I.P. - 10" D.I.P.) when requested. All pipe penetrations are placed according to job requirements.
Pipe Stands: Adjustable height pipe stands can be provided to support assembly.
Sealant: Sealant used will meet or exceed ASTM C990.
Steps: Aligned under hatch unless specified.

6 Gang Meter Vault

Date: 2.012011

Drawn By: Eric Barger

Approx. Vault Weight: 3,050 lbs.