


Top View

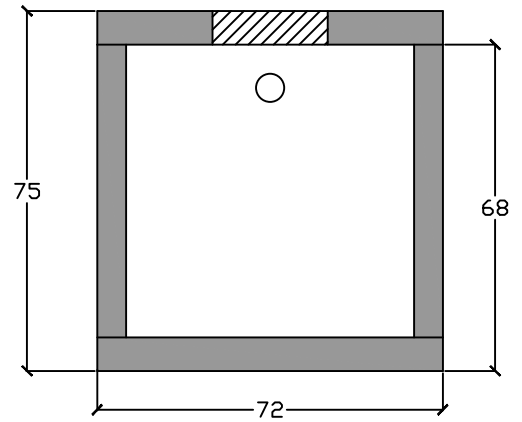


End View

- ASTM C 1613 compliant
- HS20 traffic rated
- **6" inlet/outlet (standard)**
- 6" PVC 90 in baffle wall
- 2/3 - 1/3 compartment capacity


Weights

Lid - 6,000 lb
Body - 18,000 lb


ASTM C 990 Butyl Sealant



- Lifting anchors to be cast into vault
- CS1800 internal coating

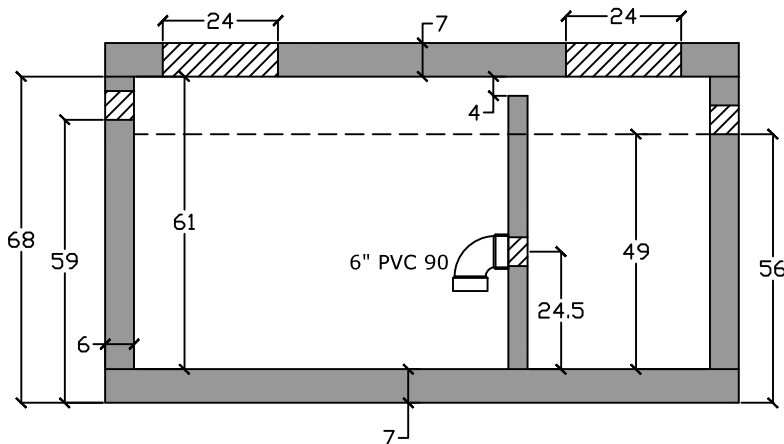

Side View

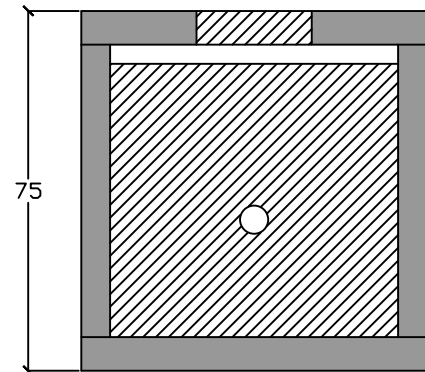

Baffle View

Specifications

Concrete: 5,000 psi minimum strength (28 day)
Reinforcing: Primary reinforcement will be rebar.
Risers: Grade rings and manhole frames and covers sold separately.
Sealant: Sealant used in the seam of the tank will meet or exceed ASTM C990.
Pipe Penetrations: Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.
Partition Wall: The partition wall, if present, is poured monolithically.
Watertight: ASTM C 1227 latest revision. Tank must be tested within 3 working days of delivery.
Drawing: All measurements are accurate within ± 1 inch.

Tank Warranty: See Terms and Conditions.



C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

Unloading: Customer responsible for unloading and setting the tank.

Installation: There shall be a minimum of 6" of 3/4" stone bedding. This tank is designed for HS20 traffic loads and with a max backfill cover of 8' and a minimum of 6".

**Grease Trap HS20 1500 Gallon Top Seam
Metro - Nashville, TN**

Date: 8.032016

Drawn By: Eric Barger

Approx. Weight:

See above